Project*

First Saved	Monday, August 4, 2025
Last Saved	Tuesday, August 5, 2025
Product Version	2021 R1
Save Project Before Solution	No
Save Project After Solution	No

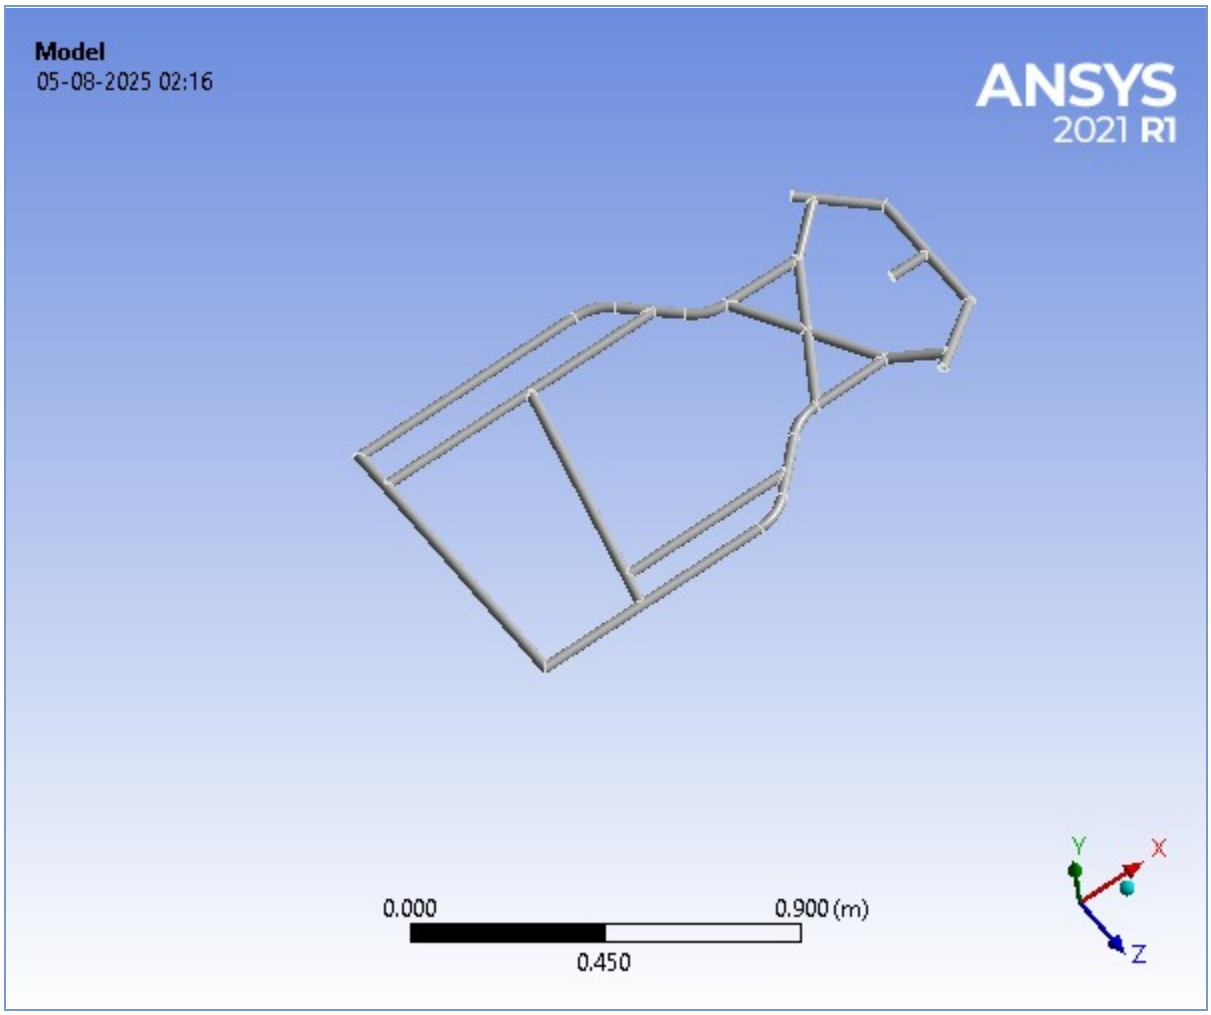

Contents

Units

TABLE 1

Unit System	Metric (m, kg, N, s, V, A) Degrees rad/s Celsius
Angle	Degrees
Rotational Velocity	rad/s
Temperature	Celsius

Model (A4)

Geometry

TABLE 2
Model (A4) > Geometry

Object Name	*Geometry*
State	Fully Defined
Definition	
Source	C:\Users\USER\old chassis ansys_files\dp0\SYS\DM\SYS.scdoc
Type	SpaceClaim
Length Unit	Meters
Element Control	Program Controlled
Display Style	Body Color
Bounding Box	
Length X	1.3715 m

Length Y	6.5248e-002 m
Length Z	0.762 m
Properties	
Volume	1.176e-003 m³
Mass	9.2317 kg
Scale Factor Value	1.
Statistics	
Bodies	1
Active Bodies	1
Nodes	93252
Elements	46871
Mesh Metric	None
Update Options	
Assign Default Material	No
Basic Geometry Options	
Solid Bodies	Yes
Surface Bodies	Yes
Line Bodies	Yes
Parameters	Independent
Parameter Key	
Attributes	Yes
Attribute Key	
Named Selections	Yes
Named Selection Key	
Material Properties	Yes
Advanced Geometry Options	
Use Associativity	Yes
Coordinate Systems	Yes
Coordinate System Key	
Reader Mode Saves Updated File	No
Use Instances	Yes
Smart CAD Update	Yes
Compare Parts On Update	No
Analysis Type	3-D
Mixed Import Resolution	None
Import Facet Quality	Source
Clean Bodies On Import	No
Stitch Surfaces On Import	None
Decompose Disjoint Geometry	Yes
Enclosure and Symmetry Processing	Yes

TABLE 3
Model (A4) > Geometry > Parts

Object Name	*Component1\Pipe 1.0 SCH 40(1)[17]*
State	Meshed
Graphics Properties	
Visible	Yes
Transparency	1
Definition	
Suppressed	No
Stiffness Behavior	Flexible
Coordinate System	Default Coordinate System

Reference Temperature	By Environment
Treatment	None
Material	
Assignment	AISI 4130
Nonlinear Effects	Yes
Thermal Strain Effects	Yes
Bounding Box	
Length X	1.3715 m
Length Y	6.5248e-002 m
Length Z	0.762 m
Properties	
Volume	1.176e-003 m³
Mass	9.2317 kg
Centroid X	-4.7177e-002 m
Centroid Y	1.8747e-003 m
Centroid Z	-6.2942e-003 m
Moment of Inertia Ip1	0.57549 kg·m²
Moment of Inertia Ip2	2.2742 kg·m²
Moment of Inertia Ip3	1.7006 kg·m²
Statistics	
Nodes	93252
Elements	46871
Mesh Metric	None
CAD Attributes	
PartTolerance:	0.00000001
Color:175.159.143	

TABLE 4
Model (A4) > Materials

Object Name	*Materials*
State	Fully Defined
Statistics	
Materials	1
Material Assignments	0

Coordinate Systems

TABLE 5
Model (A4) > Coordinate Systems > Coordinate System

Object Name	*Global Coordinate System*
State	Fully Defined
Definition	
Type	Cartesian
Coordinate System ID	0.
Origin	
Origin X	0. m
Origin Y	0. m
Origin Z	0. m
Directional Vectors	
X Axis Data	[1. 0. 0.]
Y Axis Data	[0. 1. 0.]
Z Axis Data	[0. 0. 1.]

Connections

TABLE 6
Model (A4) > Connections

Object Name	*Connections*
State	Fully Defined
Auto Detection	
Generate Automatic Connection On Refresh	Yes
Transparency	
Enabled	Yes

TABLE 7
Model (A4) > Connections > Contacts

Object Name	*Contacts*
State	Fully Defined
Definition	
Connection Type	Contact
Scope	
Scoping Method	Geometry Selection
Geometry	All Bodies
Auto Detection	
Tolerance Type	Slider
Tolerance Slider	0.
Tolerance Value	3.9258e-003 m
Use Range	No
Face/Face	Yes
Face-Face Angle Tolerance	75. °
Face Overlap Tolerance	Off
Cylindrical Faces	Include
Face/Edge	No
Edge/Edge	No
Priority	Include All
Group By	Bodies
Search Across	Bodies
Statistics	
Connections	0
Active Connections	0

Mesh

TABLE 8
Model (A4) > Mesh

Object Name	*Mesh*
State	Solved
Display	
Display Style	Use Geometry Setting
Defaults	
Physics Preference	Mechanical
Element Order	Program Controlled
Element Size	1.e-002 m
Sizing	
Use Adaptive Sizing	Yes

Resolution	Default (2)
Mesh Defeaturing	Yes
Defeature Size	Default
Transition	Fast
Span Angle Center	Coarse
Initial Size Seed	Assembly
Bounding Box Diagonal	1.5703 m
Average Surface Area	1.2659e-002 m²
Minimum Edge Length	4.6294e-004 m
Quality	
Check Mesh Quality	Yes, Errors
Error Limits	Aggressive Mechanical
Target Quality	Default (0.050000)
Smoothing	Medium
Mesh Metric	None
Inflation	
Use Automatic Inflation	None
Inflation Option	Smooth Transition
Transition Ratio	0.272
Maximum Layers	5
Growth Rate	1.2
Inflation Algorithm	Pre
View Advanced Options	No
Advanced	
Number of CPUs for Parallel Part Meshing	Program Controlled
Straight Sided Elements	No
Rigid Body Behavior	Dimensionally Reduced
Triangle Surface Mesher	Program Controlled
Topology Checking	Yes
Pinch Tolerance	Please Define
Generate Pinch on Refresh	No
Statistics	
Nodes	93252
Elements	46871

Named Selections

TABLE 9
Model (A4) > Named Selections > Named Selections

Object Name	*NONE*	*NONE_(Faces)_*
State	Fully Defined	
Scope		
Scoping Method	Geometry Selection	
Geometry	6 Edges	3 Faces
Definition		
Send to Solver	Yes	
Protected	Program Controlled	
Visible	Yes	
Program Controlled Inflation	Exclude	
Statistics		
Type	Imported	
Total Selection	6 Edges	3 Faces

Length	0.36645 m	
Suppressed	0	
Used by Mesh Worksheet	No	
Surface Area		0.10657 m²

Static Structural (A5)

TABLE 10
Model (A4) > Analysis

Object Name	*Static Structural (A5)*
State	Solved
Definition	
Physics Type	Structural
Analysis Type	Static Structural
Solver Target	Mechanical APDL
Options	
Environment Temperature	22. °C
Generate Input Only	No

TABLE 11
Model (A4) > Static Structural (A5) > Analysis Settings

Object Name	*Analysis Settings*
State	Fully Defined
Step Controls	
Number Of Steps	1.
Current Step Number	1.
Step End Time	1. s
Auto Time Stepping	Program Controlled
Solver Controls	
Solver Type	Program Controlled
Weak Springs	Off
Solver Pivot Checking	Program Controlled
Large Deflection	Off
Inertia Relief	Off
Quasi-Static Solution	Off
Rotordynamics Controls	
Coriolis Effect	Off
Restart Controls	
Generate Restart Points	Program Controlled
Retain Files After Full Solve	No
Combine Restart Files	Program Controlled
Nonlinear Controls	
Newton-Raphson Option	Program Controlled
Force Convergence	Program Controlled
Moment Convergence	Program Controlled
Displacement Convergence	Program Controlled
Rotation Convergence	Program Controlled
Line Search	Program Controlled
Stabilization	Program Controlled
Advanced	
Inverse Option	No
Contact Split (DMP)	Off

Output Controls	
Stress	Yes
Surface Stress	No
Back Stress	No
Strain	Yes
Contact Data	Yes
Nonlinear Data	No
Nodal Forces	No
Volume and Energy	Yes
Euler Angles	Yes
General Miscellaneous	No
Contact Miscellaneous	No
Store Results At	All Time Points
Result File Compression	Program Controlled
Analysis Data Management	
Solver Files Directory	C:\Users\USER\old chassis ansys_files\dp0\SYS\MECH\
Future Analysis	None
Scratch Solver Files Directory	
Save MAPDL db	No
Contact Summary	Program Controlled
Delete Unneeded Files	Yes
Nonlinear Solution	No
Solver Units	Active System
Solver Unit System	mks

TABLE 12
Model (A4) > Static Structural (A5) > Accelerations

Object Name	*Standard Earth Gravity*
State	Fully Defined
Scope	
Geometry	All Bodies
Definition	
Coordinate System	Global Coordinate System
X Component	0. m/s² (ramped)
Y Component	-9.8066 m/s² (ramped)
Z Component	0. m/s² (ramped)
Suppressed	No
Direction	-Y Direction

FIGURE 1
Model (A4) > Static Structural (A5) > Standard Earth Gravity

TABLE 13
Model (A4) > Static Structural (A5) > Loads

Object Name	*Fixed Support*	*Fixed Support 2*	*Fixed Support 3*	*Fixed Support 4*	*Force*	*Force 2*
State	Fully Defined					
Scope						
Scoping Method	Geometry Selection					
Geometry	1 Edge		1 Face			2 Faces
Definition						
Type	Fixed Support				Force	
Suppressed	No					
Define By					Components	
Applied By					Surface Effect	
Coordinate System					Global Coordinate System	
X Component					0. N (ramped)	
Y Component					-740. N (ramped)	-75. N (ramped)
Z Component					0. N (ramped)	

FIGURE 2
Model (A4) > Static Structural (A5) > Force

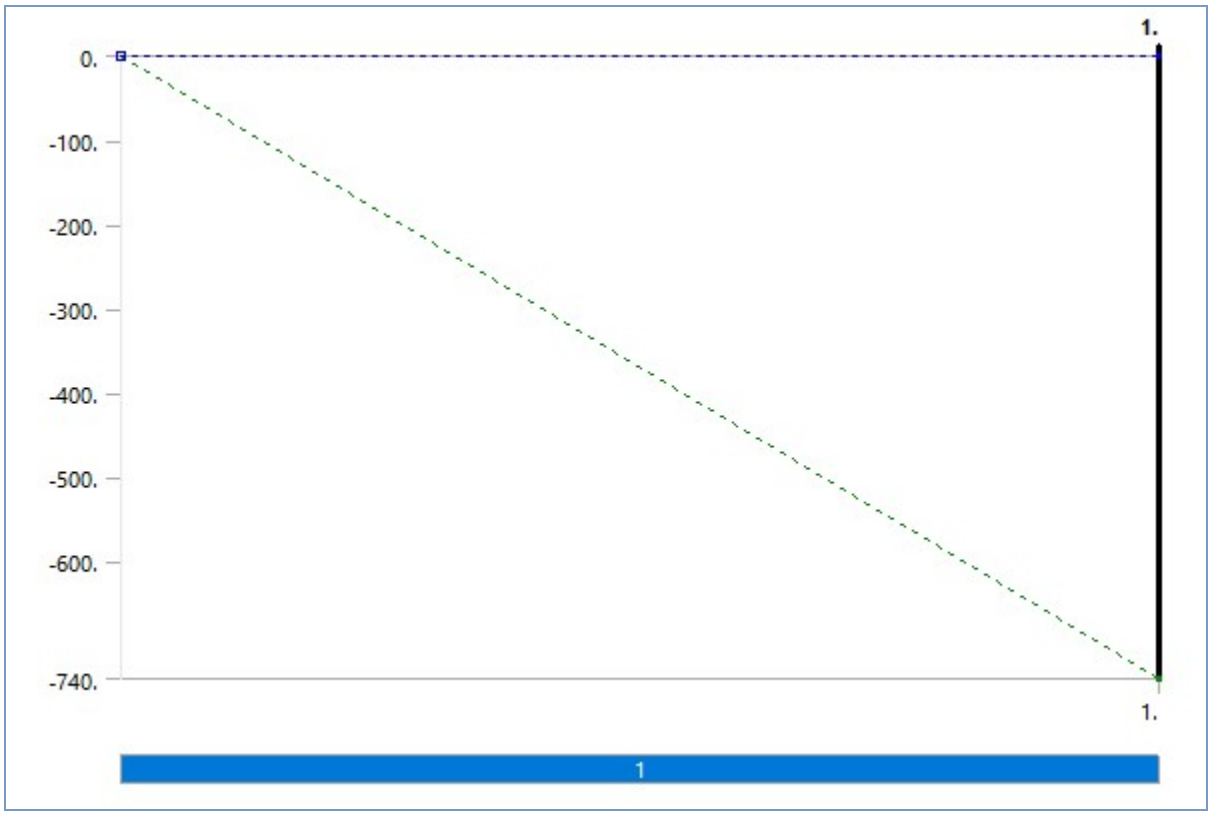

FIGURE 3
Model (A4) > Static Structural (A5) > Force 2

Solution (A6)

TABLE 14
Model (A4) > Static Structural (A5) > Solution

Object Name	*Solution (A6)*
State	Solved
Adaptive Mesh Refinement	
Max Refinement Loops	1.
Refinement Depth	2.
Information	
Status	Done
MAPDL Elapsed Time	8. s
MAPDL Memory Used	1.166 GB
MAPDL Result File Size	32.25 MB
Post Processing	
Beam Section Results	No
On Demand Stress/Strain	No

TABLE 15
Model (A4) > Static Structural (A5) > Solution (A6) > Solution Information

Object Name	*Solution Information*
State	Solved
Solution Information	
Solution Output	Solver Output
Newton-Raphson Residuals	0
Identify Element Violations	0
Update Interval	2.5 s
Display Points	All
FE Connection Visibility	
Activate Visibility	Yes
Display	All FE Connectors
Draw Connections Attached To	All Nodes
Line Color	Connection Type
Visible on Results	No
Line Thickness	Single
Display Type	Lines

TABLE 16
Model (A4) > Static Structural (A5) > Solution (A6) > Results

Object Name	*Total Deformation*	*Equivalent Elastic Strain*	*Maximum Principal Stress*
State	Solved		
Scope			
Scoping Method	Geometry Selection		
Geometry	All Bodies		
Definition			
Type	Total Deformation	Equivalent Elastic Strain	Maximum Principal Stress
By	Time		
Display Time	Last		
Calculate Time History	Yes		
Identifier			
Suppressed	No		
Results			
Minimum	0. m	9.135e-011 m/m	-5.2763e+006 Pa
Maximum	6.2188e-004 m	2.8188e-004 m/m	5.6902e+007 Pa
Average	8.1134e-005 m	2.1293e-005 m/m	2.219e+006 Pa

Minimum Occurs On	Component1\Pipe 1.0 SCH 40(1)[17]	
Maximum Occurs On	Component1\Pipe 1.0 SCH 40(1)[17]	
Information		
Time	1. s	
Load Step	1	
Substep	1	
Iteration Number	1	
Integration Point Results		
Display Option		Averaged
Average Across Bodies		No

FIGURE 4
Model (A4) > Static Structural (A5) > Solution (A6) > Total Deformation

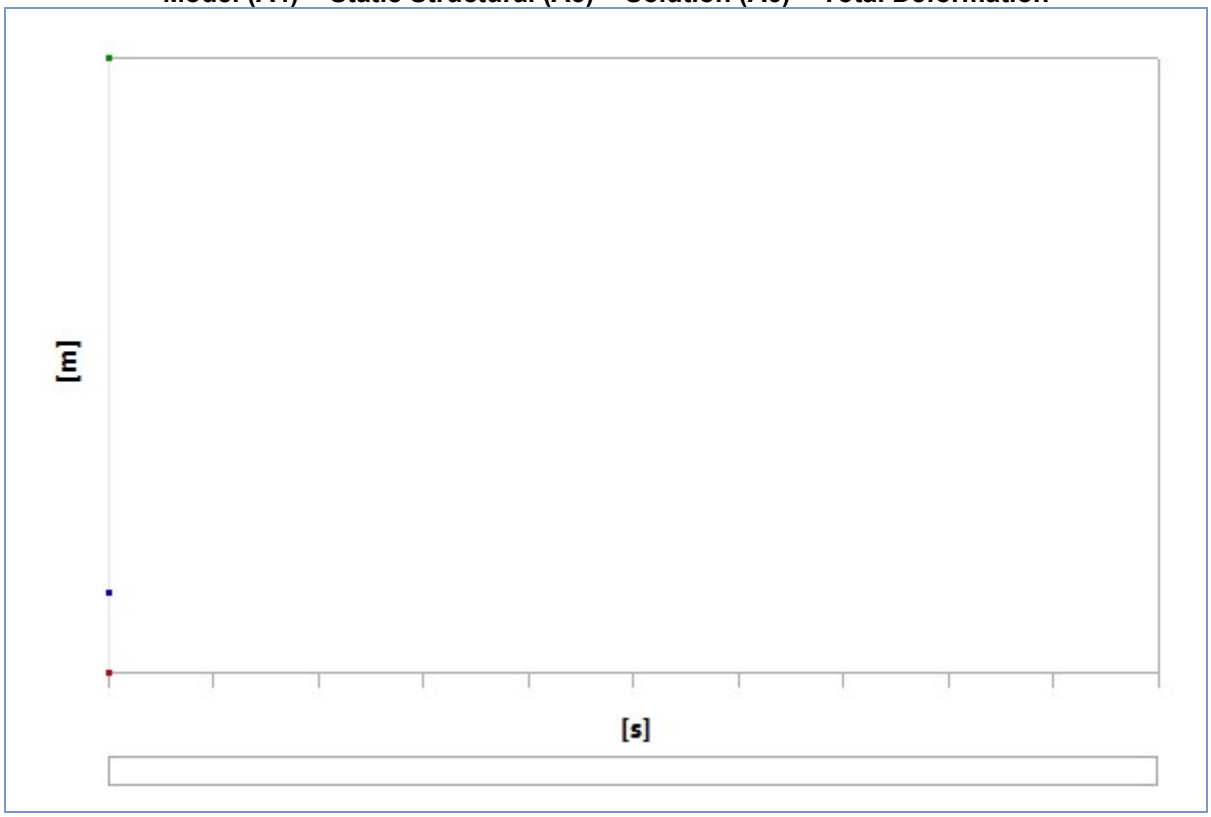

TABLE 17
Model (A4) > Static Structural (A5) > Solution (A6) > Total Deformation

Time [s]	Minimum [m]	Maximum [m]	Average [m]
1.	0.	6.2188e-004	8.1134e-005

FIGURE 5
Model (A4) > Static Structural (A5) > Solution (A6) > Equivalent Elastic Strain

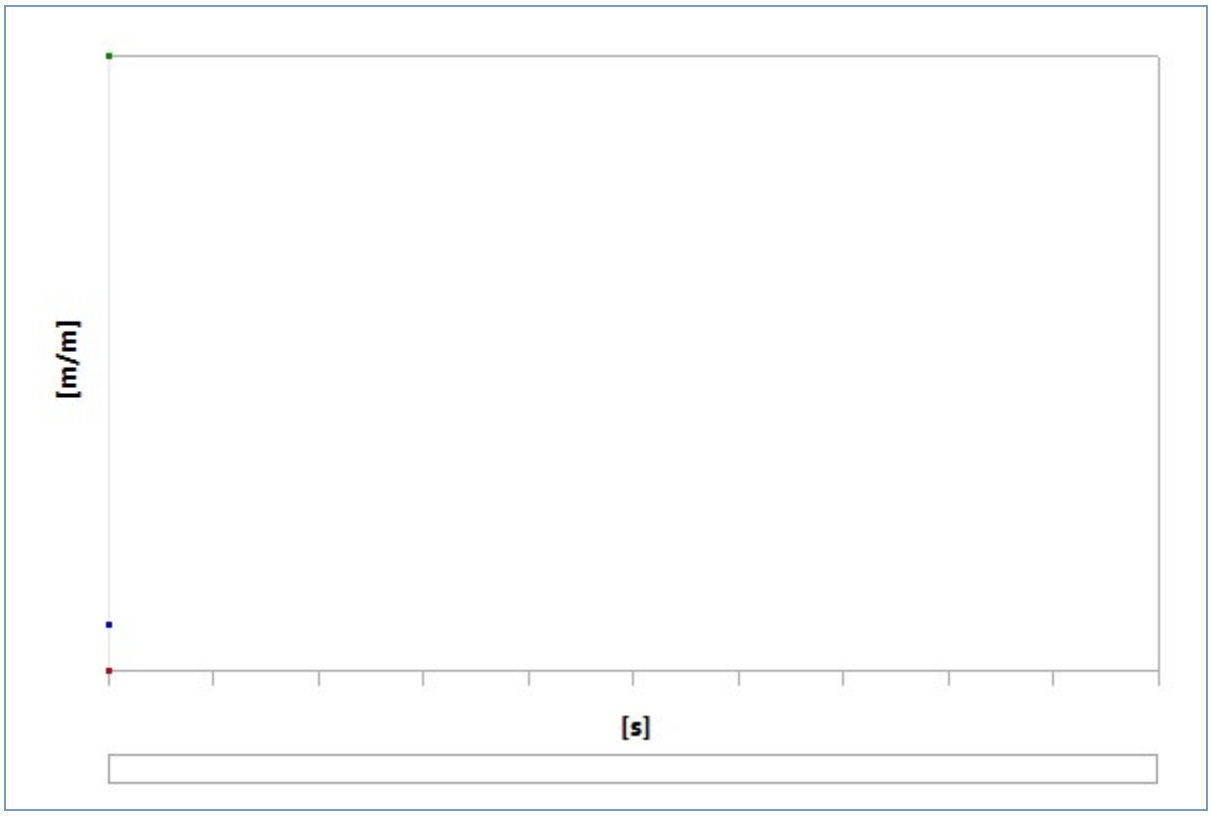

TABLE 18
Model (A4) > Static Structural (A5) > Solution (A6) > Equivalent Elastic Strain

Time [s]	Minimum [m/m]	Maximum [m/m]	Average [m/m]
1.	9.135e-011	2.8188e-004	2.1293e-005

FIGURE 6
Model (A4) > Static Structural (A5) > Solution (A6) > Maximum Principal Stress

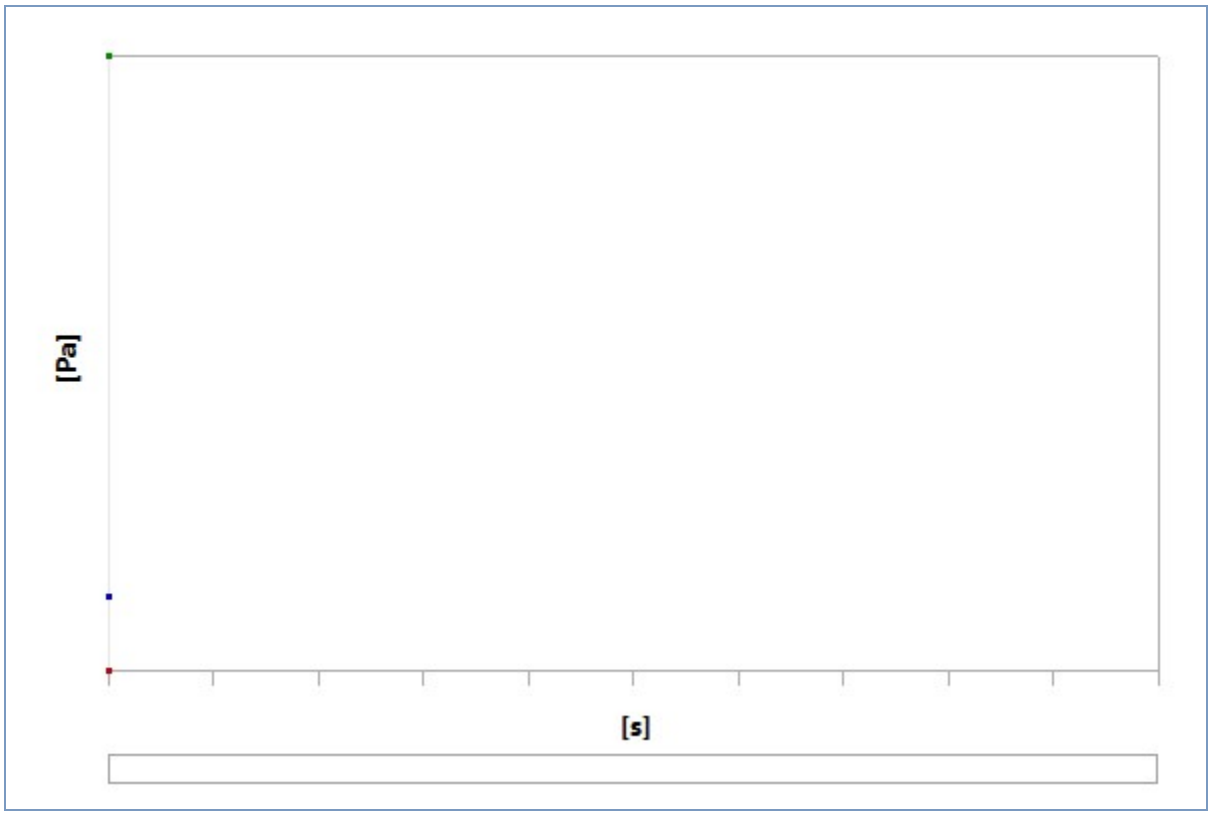

TABLE 19
Model (A4) > Static Structural (A5) > Solution (A6) > Maximum Principal Stress

Time [s]	Minimum [Pa]	Maximum [Pa]	Average [Pa]
1.	-5.2763e+006	5.6902e+007	2.219e+006

TABLE 20
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Safety Tools

Object Name	*Stress Tool*
State	Solved
Definition	
Theory	Max Equivalent Stress
Stress Limit Type	Tensile Yield Per Material

TABLE 21
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool > Results

Object Name	*Safety Factor*
State	Solved
Scope	
Scoping Method	Geometry Selection
Geometry	All Bodies
Definition	
Type	Safety Factor
By	Time
Display Time	Last
Calculate Time History	Yes
Identifier	
Suppressed	No
Integration Point Results	

Display Option	Averaged
Average Across Bodies	No
Results	
Minimum	7.9858
Minimum Occurs On	Component1\Pipe 1.0 SCH 40(1)[17]
Information	
Time	1. s
Load Step	1
Substep	1
Iteration Number	1

FIGURE 7
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool > Safety Factor

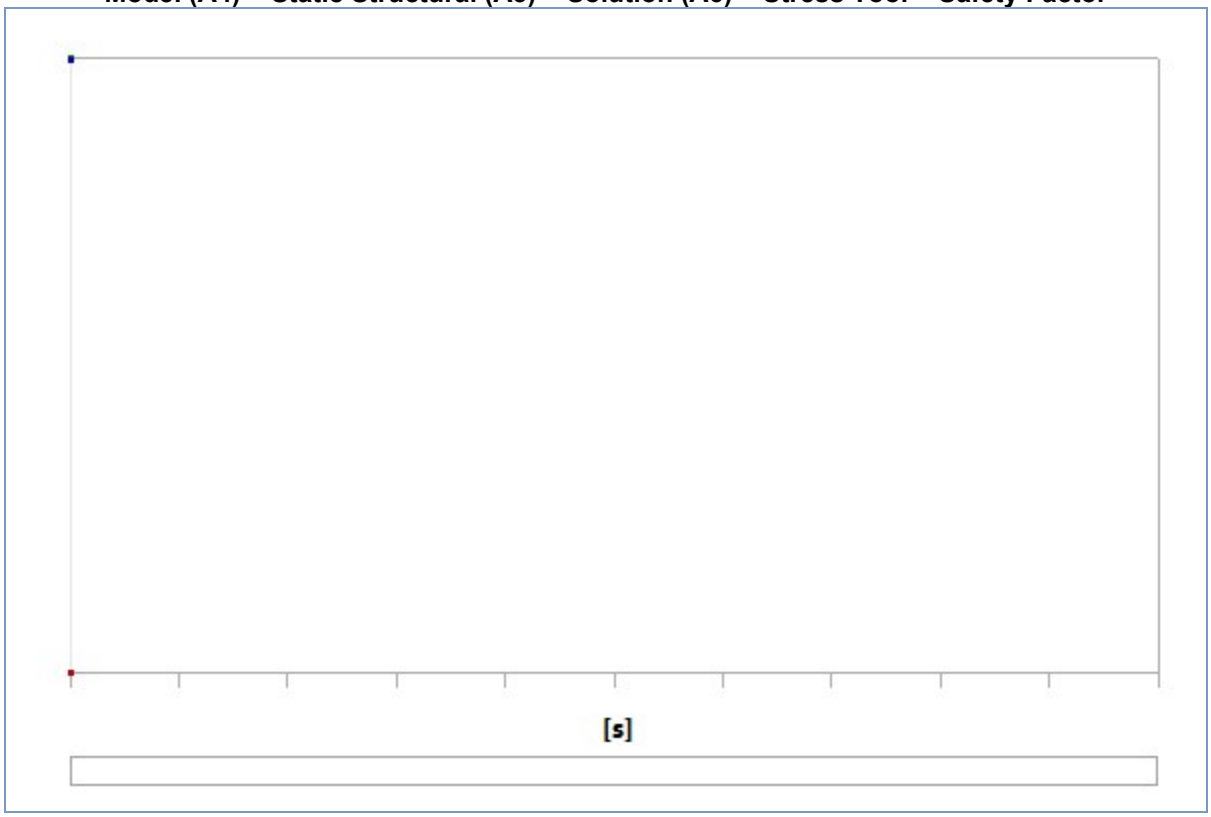

TABLE 22
Model (A4) > Static Structural (A5) > Solution (A6) > Stress Tool > Safety Factor

Time [s]	Minimum	Maximum	Average
1.	7.9858	15.	14.985

Material Data

AISI 4130

TABLE 23
AISI 4130 > Constants

Density	7850 kg m^-3

TABLE 24
AISI 4130 > Color

Red	Green	Blue
130	177	176

TABLE 25
AISI 4130 > Isotropic Elasticity

Young's Modulus Pa	Poisson's Ratio	Bulk Modulus Pa	Shear Modulus Pa	Temperature C
2.05e+011	0.29	1.627e+011	7.9457e+010	

TABLE 26
AISI 4130 > Tensile Yield Strength

Tensile Yield Strength Pa
4.6e+008